

DC135

Basic guide rail door closer up to 950mm door width



ASSA ABLOY DC135


- Certified in compliance with EN 1154, size 3
- Suitable for fire and smoke protection doors
- For single action doors up to 950 mm wide

Characteristics of DC135

- Can be used for left and right-handed doors
- Closing speed, latching speed and backcheck continuously adjustable using regulating valves
- Thermodynamic valves for consistent performance
- Opening angle up to 180°
- Standard colours: silver (EV1), white, similar to (RAL9016), black, similar to (RAL9005)



CE	ASSA ABLOY AUBE ANJOU 10 avenue de L'Europe Parc d'Entreprises du Grand Troyes 10300 Sainte Savine, France		14
	DC135		
Dangerous substances: None			

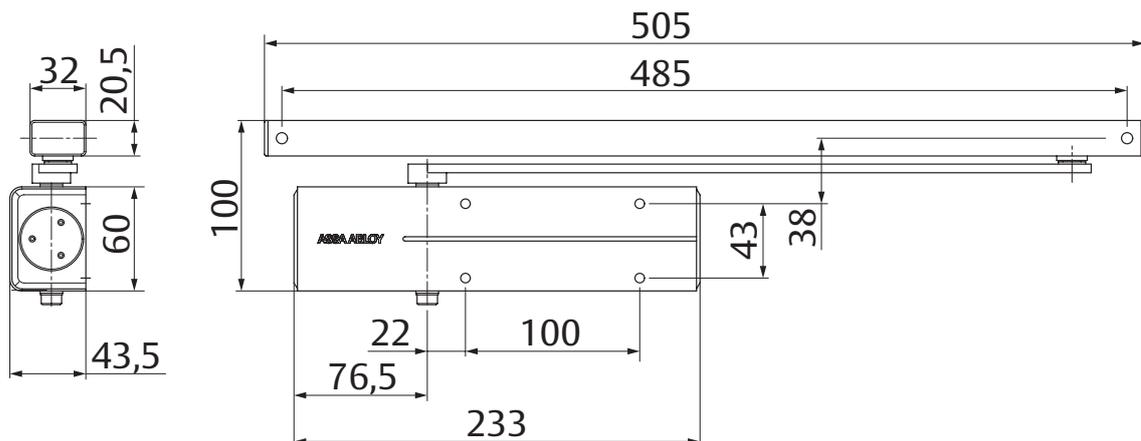

DC135

Technical attributes

Technical attributes	
Door width up to	950 mm
Closing force	EN 3
Suitable for fire doors	Yes
Handing	Left / right handed
Closing speed	Variable between 180°-15°
Latching speed	Variable between 15°-0°
Backcheck	Variable above 75°
Weight	2.4 kg
Height	60 mm
Depth	44 mm
Length	233 mm
Certified in compliance with	EN 1154
CE marking for building products	Yes

Our service for you: here you can see the individual advantages of our door closer models for your respective field of business.

The advantages at a glance

Customer segment	Advantages
Project planners	- Modern and compact design - Favourably priced, reliable closer model
Builders	- One drilling template overall - Quick and easy installation - Suitable for left and right handed doors - Easy to adjust
Trade	- Inexpensive closer model for standard doors - All-inclusive package with door closer and guide rail
User	- Thermodynamic valves - Backcheck feature offers optimum protection for doors and walls

Specifications for DC135

ASSA ABLOY Door Closer DC135 featuring rack and pinion technology with guide rail in compliance with EN 1154

- Closing force EN size 3, for doors up to 950 mm wide
- Closing speed, latching speed and backcheck continuously adjustable
- Suitable for fire and smoke protection doors (*)
- CE approved
- Suitable for left and right handed doors



Colour:

- Silver EV1
- White, similar to RAL9016
- Black, similar to RAL9005

DC135



Dimensional drawings

Door closers are suitable for left and right handed doors.
The picture shows a left or right hinged door. Other direction of rotation is in reflection


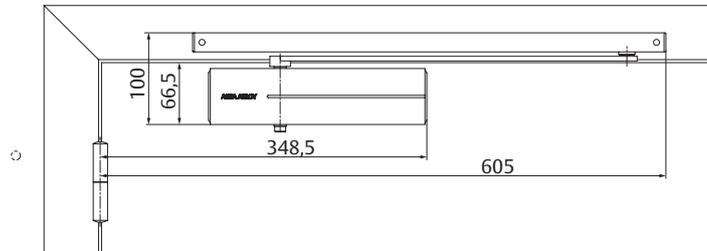



1 - Door leaf mounting hinge side


Max. angle of opening 180°

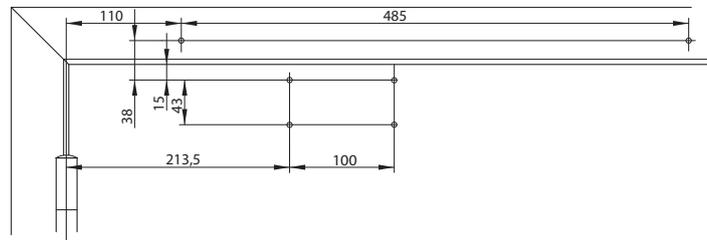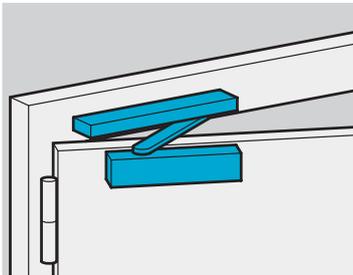

With mounting plate A187

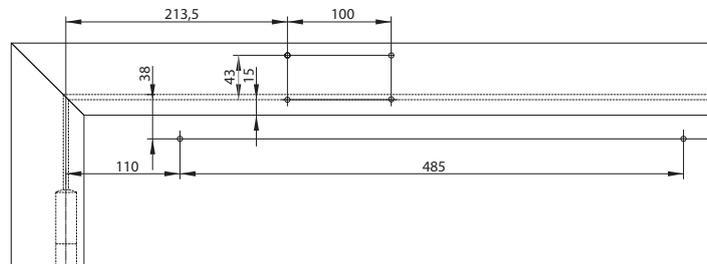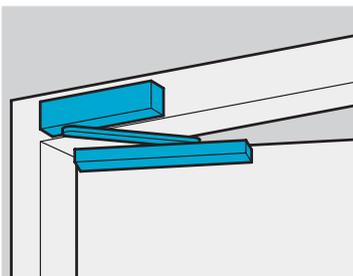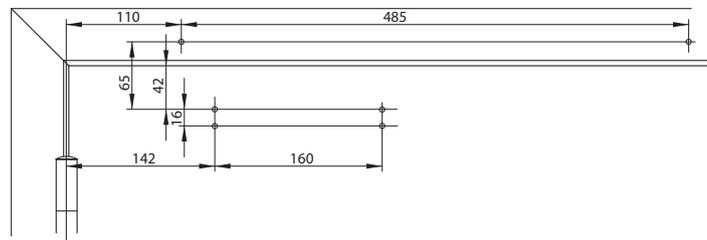

4 - Mounting on frame hinge side

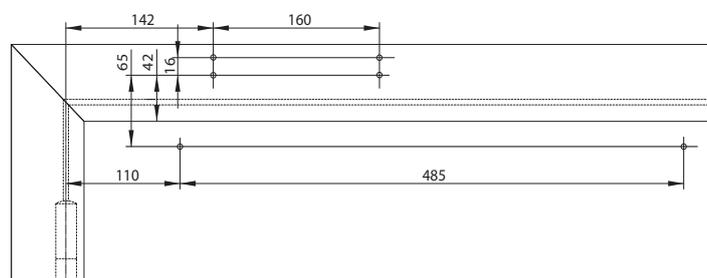


With mounting plate A187


DC135

Accessories and order placement information

Mounting plate A187

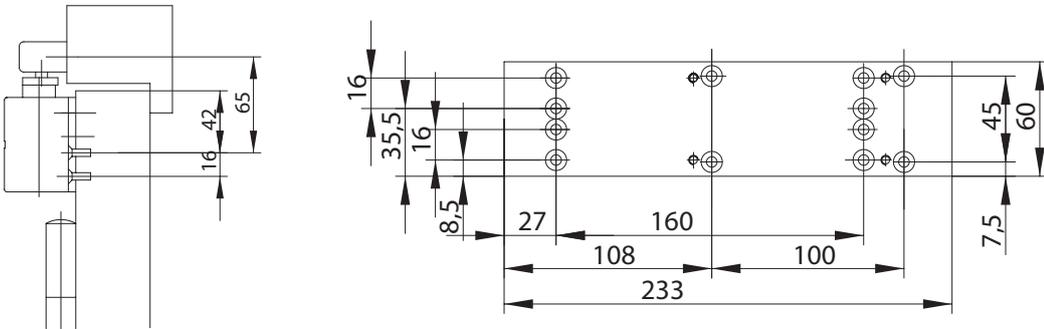

Mounting plate A130

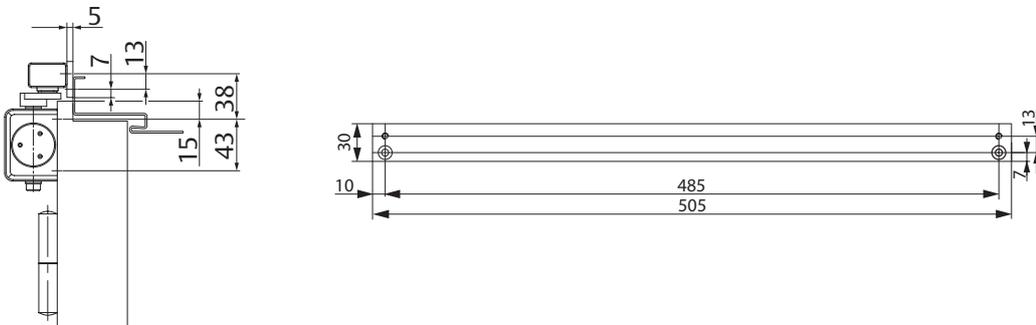

Hold-open device A152

- Simple fitting into guide rail G193 and G195.
- Hold-open angle max. 130°
- Not approved for use on fire and smoke protection doors
- Continuously adjustable holding force



Opening damper A153

- Helps to prevent the door and door handle from hitting a return wall.
- Simple fitting into guide rail G193 and G195.
- Opening damper continuously adjustable up to an opening angle of max. 130°.
- Does not replace a door stop.



Designation / Item	Order no.	Designation / Item	Order no.
DC135, EN size 3, silver EV1	DC135----DEV1-	Mounting plate A130, silver EV1	DCA130----EV1-
DC135, EN size 3, white, similar to RAL9016	DC135----D9016	Mounting plate A130, white, similar to RAL9016	DCA130----9016
DC135, EN size 3, brown, similar to RAL8014	DC135----D8014	Mounting plate A130, brown, similar to RAL8014	DCA130----8014
DC135, EN size 3, black, similar to RAL9005	DC135----D9005	Mounting plate A130, black, similar to RAL9005	DCA130----9005
Mounting Plate A187, silver EV1	DCA187----EV1-	Hold-open device A152	DCA152-----
Mounting Plate A187, white, similar to RAL9016	DCA187----9016	Opening damper A153	DCA153-----
Mounting Plate A187, brown, similar to RAL8014	DCA187----8014		
Mounting Plate A187, black similar to RAL9005	DCA187----9005		