ABLOY® FD460




Product description ABLOY FD460 is a slim and aesthetic fire door closing system with sliding arm. The door is held open by hold open device in selected angle until the power is switched off, e.g. when smoke detectors react to smoke. Recommended to be used with ABLOY DC250 door closer.

Electromechanical hold open device for single doors

- Overview of Advantages · CE certified according to EN1155 · Adjustable hold open angle 70°-120°

- Adjustable hold open force
 Maximum door weight 120 kg and door width 1400 mm
 Installed with door closer that can be adjusted to force size EN 3-6




Technical data

1400 mm
120 kg
Yes
Left/right handed
Frame installation, hinge and non-hinge side
70°-120°
70°-115°
1,1 kg
60mA, 24VDC
EC-Certificate of conformity 0432-CPD-0050
Yes
White (RAL 9016), Silver (EV1), Painted brass, Brown (RAL 8014), Black (RAL 9005), Customised finish
DC250, DC330, DC240 (Hinge side only)

This content is protected by Intellectual Property Rights Laws. The title to the content shall not pass to you, and instead shall remain with Abloy Oy or a third party holding the title. Abloy develops continuously the products and solutions offered. Therefore, the information contained in the document is subject to change without notice. ABLOY PROVIDES THIS CONTENT ON AN "AS IS" BASIS WITHOUT ANY WARRANTIES OF ANY KIND, EXPRESS, IMPLIED, OR STATUTORY."



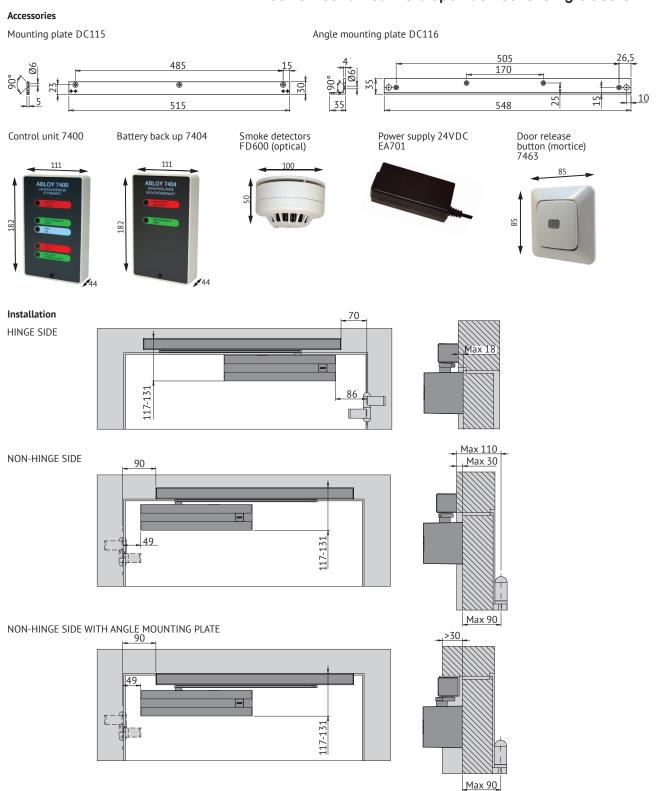

ABLOY[®] FD460 Electromechanical hold open device for single doors

This content is protected by Intellectual Property Rights Laws. The title to the content shall not pass to you, and instead shall remain with Abloy Oy or a third party holding the title. Abloy develops continuously the products and solutions offered. Therefore, the information contained in the document is subject to change without notice. ABLOY PROVIDES THIS CONTENT ON AN "AS IS" BASIS WITHOUT ANY WARRANTIES OF ANY KIND, EXPRESS, IMPLIED, OR STATUTORY."

